

P.O. BOX 1008, SPARTA, NJ 07871 www.gpimeters.com email: sales@gpimeters.com Phone: 973-940-1684 Fax: 973-940-1651

**Industrial Grade Metering Products** 


1-888-722-3569

## **Conditioned Signal Output Module**

## Square Wave Output

To achieve square wave output, please reference the wiring diagram below and use an Electronic Digital Meter Battery Kit (not supplied) for battery power. The terminal block is located on the back right side of the module. To change the connections, loosen the appropriate connections, reconnect in the proper positions, and tighten the screws.

Ten feet (3m) of cable is provided with the module, trim it to desired length or extend it as necessary.

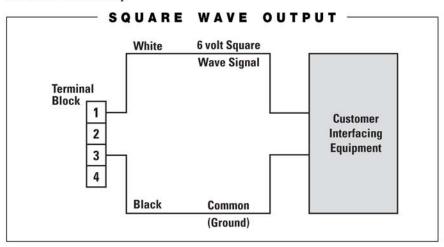

The terminal block is identified as follows:

> Pin #1: 6 volt square wave Pin #2: +9 to 35 volt DC Input

> > (not used)

Pin #3: Common Ground

Pin #4: Open Collector Signal Output (not used)

For Open Collector Signal installation,

Use with Kit #113435-1

see reverse side.

The Waste Electrical and Electronic Equipment (WEEE) directive (2002/ 96/EC) was approved by the European Parliament and the Council of the European Union in 2003. This symbol indicates that this product contains electrical and electronic

Rev. A 920706-2

equipment that may include batteries, printed circuit boards, liquid crystal displays or other components that may be subject to local disposal regulations at your location. Please understand those regulations and dispose of this product in a responsible manner.

©2006 GREAT PLAINS INDUSTRIES, INC., Wichita KS, Printed in the U.S.A. 08/06

P.O. BOX 1008, SPARTA, NJ 07871

**Industrial Grade Metering Products**  www.gpimeters.com email: sales@gpimeters.com Phone: 973-940-1684 Fax: 973-940-1651 1-888-722-3569


## **Conditioned Signal Output Module**

## **Open Collector Signal Output**

To achieve an open collector signal output, please reference the wiring diagram below.

The terminal block is located on the back right side of the module. The module is factory assembled for open collector signal output. Please provide the (820 ohm minimum) resistor.

Ten feet (3m) of cable is provided with the module, trim it to desired length or extend it as necessary. Distances up to 5,000 ft. (1,524m) can be achieved.

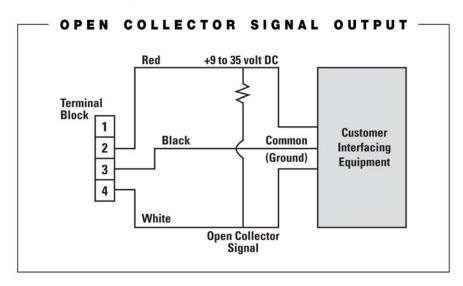

The terminal block is identified as follows:

Pin #1: 6 volt square wave (not used)

Pin #2: +9 to 35 volt DC Input

Pin #3: Common Ground

Pin #4: Open Collector Signal Output

For Square Wave Output installation, see reverse side.

Use with Kit #113435-1

©2006 GREAT PLAINS INDUSTRIES, INC., Wichita KS, Printed in the U.S.A. 08/06

Rev. A 920706-2